

## Smart Jack 3

### HARDWARE INSTALLATION GUIDE

COLOR KINETICS INCORPORATED  
10 MILK STREET, SUITE 1100  
BOSTON, MA 02108  
TEL 888 FULL RGB  
TEL 617 423 9999  
FAX 617 423 9998  
INFO@COLORKINETICS.COM  
WWW.COLORKINETICS.COM

## INTRODUCING SMART JACK 3

Color Kinetics® Smart Jack 3 allows you to control Color Kinetics lights from your personal computer's USB port.

Smart Jack 3 is primarily intended for use by Color Kinetics distributors and software developers.

### System Requirements

- Windows 98, 2000
- USB
- CD-ROM drive

### Included in this box:

- Smart Jack 3 Adapter
- USB cable

### Additional Items You'll Need

- RJ45 data cable  
(available from Color Kinetics)

### MODEL# ADP-SMRT3

©2000 Color Kinetics Incorporated. All rights reserved. Chromacore, Color Kinetics, the Color Kinetics logo, and iPlayer are registered trademarks and ColorBlast, ColorPlay, Coup de Color, iColor, and SmartJuice are trademarks of Color Kinetics Incorporated.

All other brand or product names are trademarks or registered trademarks of their respective owners. Specifications are subject to change without notice.

PUB-000025-00 Rev 00

## INSTALLING SMART JACK 3

To install the Smart Jack 3 Adapter, you must connect it to your computer, install the Smart Jack 3 device driver, and connect Smart Jack 3 to your Color Kinetics lights. (The Smart Jack 3 device driver is a program that enables your computer to communicate with Smart Jack 3.)


**NOTE:** Smart Jack 3 also comes with the Smart Jack Software, which provides some basic tools to demonstrate Color Kinetics products. For details on installing the Smart Jack Software, refer to the *Smart Jack Software User Guide*.

When you connect Smart Jack 3 to your computer, the Windows operating system automatically launches the Add New Hardware Wizard to help you install the Smart Jack 3 device driver. This driver is called USB DMX Interface and is located on the Smart Jack Software CD.

## TO INSTALL SMART JACK 3

1. Make sure your computer is on and the Windows operating system is running.
2. Insert the Smart Jack software CD into the CD-ROM drive.
3. Connect one end of the USB cable to the Smart Jack 3 USB port, and the other end to your computer's USB port. (See Fig. 1.)

Figure 1

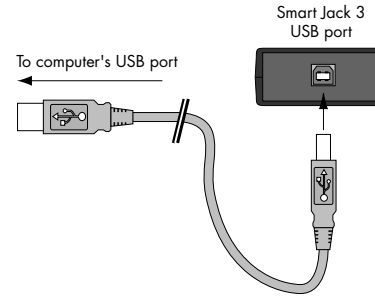

(The USB cable is keyed to ensure proper installation.)

Windows automatically detects Smart Jack 3 and launches the Add New Hardware Wizard.



4. In the Add New Hardware Wizard, click Next to begin installing the device driver.



5. Select "Search for the best driver for your device. (Recommended)", and click Next.



6. Select CD-ROM drive, (de-select all other options,) and click Next.



7. When Windows locates the USB DMX Interface, click Next to install the driver.

8. When Windows finishes installing the driver, click Finish.

## TO CONNECT SMART JACK 3 TO COLOR KINETICS LIGHTS

1. Connect one end of the RJ45 cable to the Smart Jack 3 RJ45 port, and the other end to the Data In port on your Color Kinetics light or power supply. (See Fig.2.)

Figure 2

