



Date: _____ Type: _____

Firm Name: _____


Project: _____

eW Accent MX Powercore

Direct-view white-light LED fixture with precise resolution control




eW Accent MX Powercore is a direct view linear LED fixture ideally suited for highlighting exterior architectural details with long ribbons of intense, high-quality white light in a warm 2700 K or a cool 4000 K. Variable resolution offers the ability to individually control the brightness of discrete segments of each fixture for black-and-white-only effects, video, and graphics. eW Accent MX Powercore offers the efficiency and cost-effectiveness of Powercore technology in an outdoor-rated, road-ready aluminum housing.

- Integrates patented Powercore technology — Powercore technology rapidly, efficiently, and accurately controls power output to fixtures directly from line voltage. The Philips Data Enabler Pro merges line voltage and control data and delivers them to the fixture over a single cable, dramatically simplifying installation and lowering total system cost.



- Superior binning algorithm sets new standard for color consistency — eW Accent MX Powercore exceeds the recognized standards for color quality to guarantee uniformity and consistency of hue and color temperature across LED sources, fixtures, and manufacturing runs.
- Native, onboard Ethernet — Fixtures accept Ethernet input from the Data Enabler Pro to support long control runs not subject to DMX data and addressing limitations.
- Precise resolution control — Fixtures can be addressed and controlled in increments down to 1.2 inches (30 mm), or up to 4 ft (1.2 m).
- Two fixture lengths — 2 ft and 4 ft lengths are easily connected to create continuous columns of intense white light.
- Exceptional viewing angles — The diffused plastic lens, specifically designed for direct viewing, provides exceptional viewing angles and ensures uniform color mixing.

- Rugged, durable construction — This IP66-rated fixture is designed to meet the taxing requirements of outdoor installations. The extruded aluminum housing resists shock, vibration, and other forms of rough handling.
- Flexible positioning — Over-molded, end-to-end locking connectors supply both power and data. Connectors can make 180° turns for easy layout. Jumper cables of 1 ft (305 mm), 2 ft (610 mm), 5 ft (1.5 m), and 10 ft (3 m) can add extra space between fixtures.

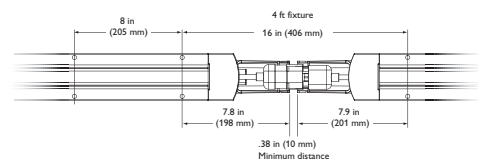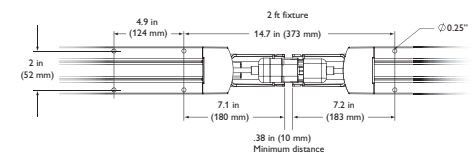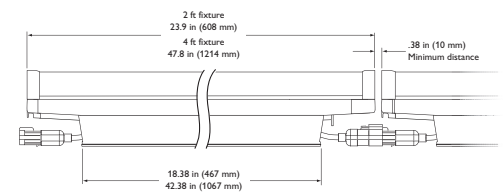

- Industry-leading controls — Works seamlessly with the complete Philips line of controllers, including Video System Manager Pro, Light System Manager, and iPlayer 3, as well as third-party controllers.
- Universal power input range — Accepts a universal power input range of 100 to 240 VAC for consistent installation anywhere in the world. Each Data Enabler Pro can support multiple fixtures for creating long lines of video or ribbons of intricately changing color.

For detailed product information, please refer to the eW Accent MX Powercore Product Guide at www.colorkinetics.com/ls/essentialwhite/ewaccentmxpc/

PHILIPS

Specifications

Due to continuous improvements and innovations, specifications may change without notice.

Item	Specification	2 ft	4 ft
Output	Color Temperature*	2700 K / 4000 K	
	Lumen Maintenance†	50,000+ hours L50 @ 50° C (full output)	
Electrical	Input Voltage	100 – 240 VAC, auto-switching, 50 / 60 Hz via Data Enabler Pro	
	Power Consumption	10 W per foot maximum at full output, steady state	
Control	Interface	Data Enabler Pro (DMX / Ethernet)	
	Control System	Philips full range of controllers, including Video System Manager Pro, Light System Manager, and iPlayer® 3, or third-party DMX controllers	
Physical	Dimensions (Height x Width x Depth)	3.9 x 23.9 x 2.5 in (100 x 606 x 64 mm)	3.9 x 47.8 x 2.5 in (100 x 1213 x 64 mm)
	Weight	4.5 lb (2 kg)	9.3 lb (4.2 kg)
	Housing	Sealed plastic and extruded aluminum	
	Lens	Translucent plastic	
	Fixture Connections	Over-molded, integral male / female connectors	
	Temperature Ranges	-40° – 122° F (-40° – 50° C) Operating -4° – 122° F (-20° – 50° C) Startup -40° – 176° F (-40° – 80° C) Storage	
	Humidity	0 – 95%, non-condensing	
	Maximum Fixtures Per Data Enabler Pro	25	25
Certification and Safety	Certification	UL / cUL, CE	
	Environment	Dry / Damp / Wet Location, IP66	

* Color temperatures conform to nominal CCTs as defined in ANSI Chromaticity Standard C78.377A.



† L50 = 50% maintenance of lumen output (when light output drops below 50% of initial output). Ambient temperature specified.

Photometrics

Please visit www.colorkinetics.com/support/ies/ for photometrics.

Fixtures & Accessories

Item	Type		Item Number	Philips 12NC
eW Accent MX Powercore	2700 K	2 ft	523-000058-00	910503701124
		4 ft	523-000058-01	910503701125
	4000 K	2 ft	523-000058-03	910503701127
		4 ft	523-000058-04	910503701128
Leader Cable with terminator and strain relief	50 ft (15.2 m)		108-000028-01	910503700086
	1 ft (305 mm)		108-000029-03	910503700087
	2 ft (610 mm)		108-000029-06	910503700090
	5 ft (1.5 m)		108-000029-05	910503700089
	10 ft (3 m)		108-000029-04	910503700088
Data Enabler Pro	3/4 in / 1/2 in NPT (US trade size conduit)		106-000004-00	910503701210
	PG21 / PG13 (metric size conduit)		106-000004-01	910503701211

Use Item Number when ordering in North America.



Philips Color Kinetics
3 Burlington Woods Drive
Burlington, Massachusetts 01803 USA
Tel 888.385.5742
Tel 617.423.9999
Fax 617.423.9998
www.philipscolorkinetics.com

Copyright © 2010 – 2011 Philips Solid-State Lighting Solutions, Inc. All rights reserved. Chromacore, Chromasic, CK, the CK logo, Color Kinetics, the Color Kinetics logo, ColorBlast, ColorBlaze, ColorBurst, ColorGraze, ColorPlay, ColorReach, iW Reach, eW Reach, eW Fuse, DIMand, EssentialWhite, eV, iColor, iColor Cove, IntelliWhite, iW, iPlayer, Optibin, and Powercore are either registered trademarks or trademarks of Philips Solid-State Lighting Solutions, Inc. in the United States and / or other countries. All other brand or product names are trademarks or registered trademarks of their respective owners. Due to continuous improvements and innovations, specifications may change without notice. DAS-000082-01 R02 08-11